Tiger Pipe

HUBLESS CAST IRON PIPES & FITTINGS

SUPRANUSA



HUBLESS CAST IRON

ASTM STANDARD 888

REPLACEMENT GUARANTEE


Tiger Pipe guarantees to replace any Pipe and Fittings having manufacturing defects when used in the services for which intended. No charges for labor or expenses required to repair defective material, or damages incureed by them, will be allowed. The defective item will replace or issue credit for the actual cost of the item (s) ex - factory.

All weight and dimension are subject to change and are not certified.


HUBLESS CAST IRON

ASTM STANDARD 888

HUBLESS PIPE (M.J.)

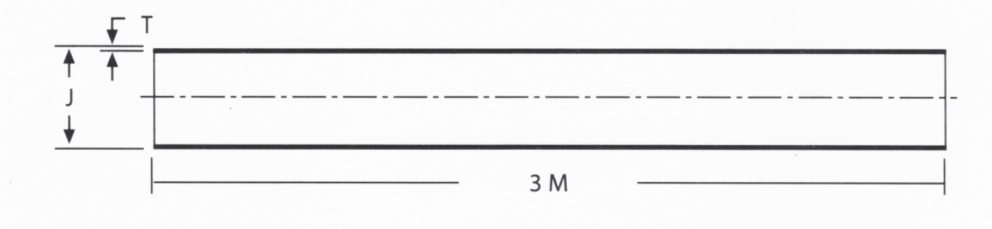

SIZE	J. Min (mm)	J. Max (mm)	T. Min (mm)	Weight (kg)	Per Bundle QTY	Per Bundle Weight
1 1/2""	46.0	50.0	3.0	13	80	1040
2"	57.0	62.0	3.0	16	62	992
3"	83.0	87.5	3.3	23	58	1334
4"	109.0	114.0	3.8	34	34	1156
6"	158.0	162.0	3.8	51	17	867
8"	210.0	216.0	4.3	81	10	810
10"	266.0	271.0	5.6	127	8	1016
12"	314.0	321.0	5.6	140	6	840

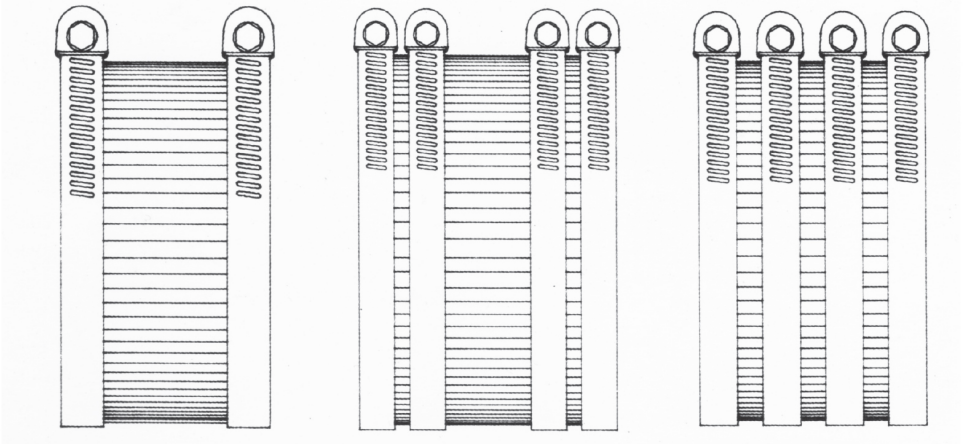


Size 1/2 "THRU4" | Size 6" | Size 8 "THRU10"

SIZE	QTY/CARTON	WEIGHT/CARTON (kg)
1 1/2"	100	13.0
2"	100	13.4
3"	100	16.2
4"	100	21.4
6"	50	24.8
8"	30	22.2
10"	25	24.0
12"	16	25.5

HUBLESS CAST IRON


ASTM STANDARD 888

STACK SUPPORT PIPE

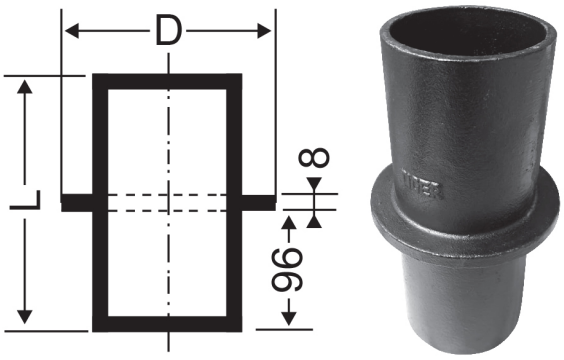


SIZE	D	L	Weight
2	87	220	1.30
3	118	220	1.80
4	145	220	2.40
6	195	220	4.10
8	245	220	5.90
10	340	300	12.35

JOINTING FLANGE

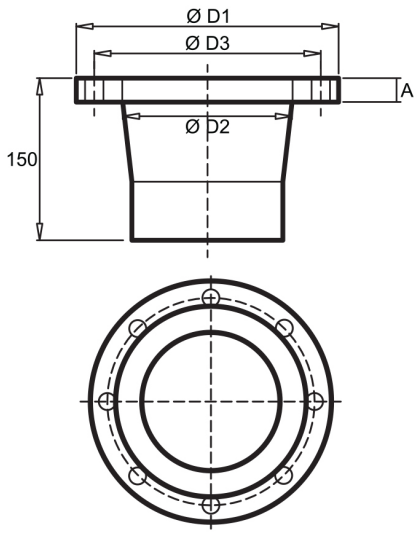


SIZE	D1	D2	A	D3	Screw	WT.
4”	220	131	24	180	M 16	5.8
6”	285	184	26	240	M 20	9.8
8”	340	235	26	295	M 20	14.5

STACK SUPPORT BRACKET

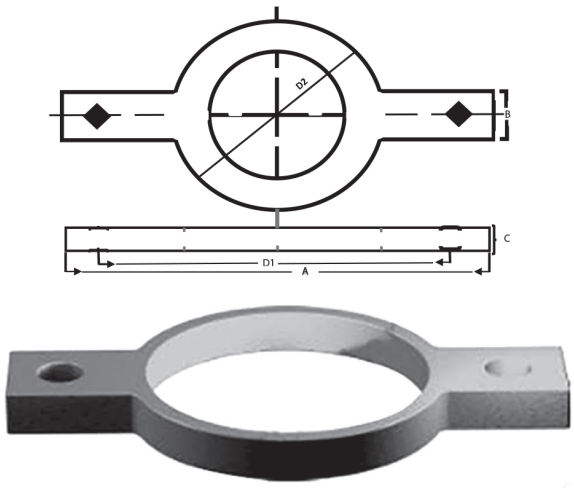

Size	D1	D2	A	B	C	Weight
2	150	108	195	33	17	0.80
3	175	133	218	33	20	1.20
4	214	162	259	33	20	1.30
6	255	222	300	33	22	2.00
8	310	278	362	36	22	2.30
10	394	354	444	40	25	5.60

GRIP COLLARS

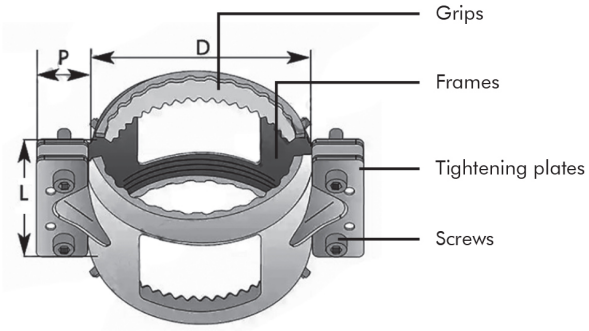


SIZE (Inch)	P	D	L	Max. Pressure (bar)	Weight	Screw
2”	22	88	76	10	0.45	M 8
3”	25	105	78	10	0.53	M 8
4”	33	145	93	10	0.90	M 8
6”	32	196	102	5	1.23	M 8
8”	32	252	118	5	1.72	M 10

HUBLESS CAST IRON


ASTM STANDARD 888

1/4 BEND

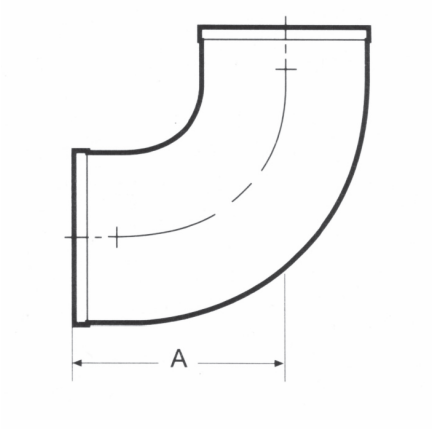


SIZE	A	WT.
1 1/2	4 1/4	1.9
2	4 1/2	2.4
3	5	3.9
4	5 1/2	6.0
6	7	15.4
8	8 1/2	27.3

1/8 BEND

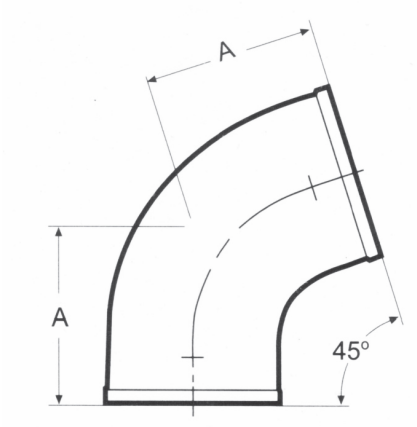


SIZE	A	WT.
1 1/2	2 1/2	1.4
2	2 3/4	1.7
3	3	2.6
4	3 1/2	4.3
6	4 1/2	9.9
8	5	16.5
10	5 1/2	29.1

WYE



SIZE	A	B	WT.
1 1/2	6	4	2.4
2	6 5/8	4 5/8	2.6
3x2	6 5/8	5 5/16	3.7
3	8	5 5/16	4.9
4x2	6 5/8	6	5.5
4x3	8	6 1/2	7.2
3	9 1/2	7 1/16	8.8
6	14 1/16	10 5/16	22.22
8x3	9 15/16	9	18.7
8x4	11 5/8	10	21.8
8x6	14 3/16	11	28.0
8	17 1/8	12	43
10x8	18 3/8	14 11/16	57.0
10	21 1/1	16 1/2	72.0

SAN TEE




SIZE	A	B	C	WT.
1 1/2	6 1/2	4 1/4	4 1/4	2.3
2	6 7/8	4 1/2	4 1/2	2.9
2x1 1/2	6 5/8	6 1/2	4 1/2	3.0
3x2	6 7/8	4 1/2	5	4.0
3	8	5	5	4.7
4x2	6 7/8	4	5 1/2	6.0
4x3	8	5	5 1/2	7.2
4	9 1/8	5 1/2	5 1/2	8.0
6x2	8 3/16	5	6 1/2	12.5
6x3	9 1/8	5 1/2	6 1/2	14.3
6x4	10 1/8	6	6 1/2	15.4
6	12 1/2	7	7	17.82
8x4	11 1/2	6 1/2	7	24.3
8	14 9/16	8	8	36.3
8x6	13 1/2	7 1/2	8	27.5

HUBLESS CAST IRON


ASTM STANDARD 888

DOUBLE WYE

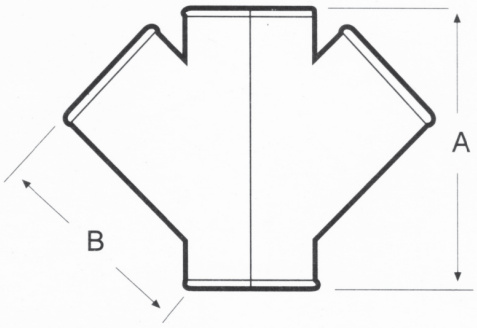

SIZE	A	B	WT.
2	6 1/2	4 1/2	4.0
3X2	6 1/2	5	4.2
3	6 1/2	5 1/4	6.3
4X2	8	6	6.5
4X3	8	6 1/2	8.4
4	9 1/2	7 1/14	11.0
6X4	11 1/14	9 1/2	19

DOUBLE COMBINATION

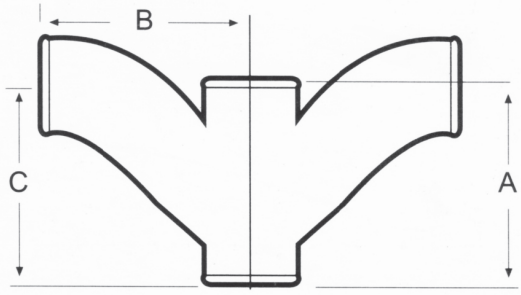


SIZE	A	B	C	WT.
2	6 1/2	4 1/2	5 1/4	6.2
3X2	6 1/2	5	5 1/4	6.5
3	6	5	7 1/16	9.9
4X2	7	7	5 1/16	9.9
4X3	8	8 1/4	7 1/4	13.0
4	10	10 1/2	9 1/4	19.8

CLEAN-OUT PLUG



SIZE	A	B	WT.
1 1/2	1 15/16	1 5/8	.5
2	2 1/2	1 11/16	.7
3	3 5/8	1 13/16	1.1
4	4 7/8	1 3/4	2.0
6	6 7/8	1 3/4	4.0
8	8 7/8	2 7/8	6.7
10	10 11/16	2 1/4	13.2

P TRAP

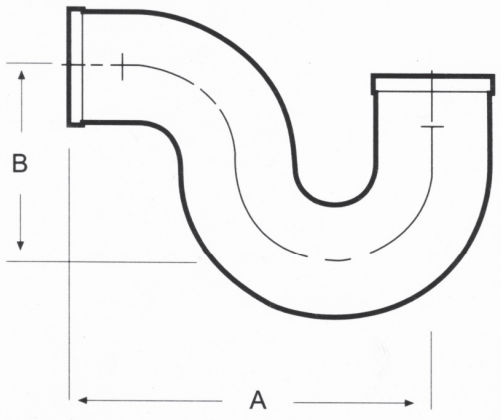


SIZE	A	B	WT.
1 1/2	5 3/4	3 1/2	3.0
2	7 1/2	4	3.7
3	9	5 1/2	8.1
4	10 1/2	6 1/2	13.7
6	14	8 1/2	33.0

HUBLESS CAST IRON


ASTM STANDARD 888

REDUCER




SIZE	A	WT.
2x1 1/2	3 1/2	1.2
3x2	3 1/2	1.5
4x2	3 1/2	2.3
4x3	3 1/2	2.3
6x2	4	4.8
6x3	4	4.0
6x4	4	4.6
8x2	4 1/2	7.8
8x3	4 1/2	7.5
8x4	4 1/2	8.0
8x6	5	9.0
10x4	5 1/2	13.2
10x6	5 1/2	15.0
10x8	6	14.0

SAN CROSS

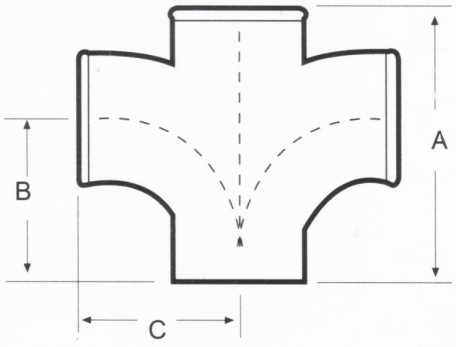

SIZE	A	B	C	WT.
1 1/2	6 1/2	4 1/4	4 1/4	3.1
2	6 7/8	4 1/2	4 1/2	5.3
3x2	6 7/8	4 1/2	5	5.4
3	8	5	5	6.2
4x2	6 7/8	4 1/2	5 1/2	7.4
4x3	8	4 15/16	5 1/2	9.7
4	9 1/8	5 1/2	5 1/2	11.0
6x4	10 1/8	6 1/2	6	17.0


BLIND FLANGE

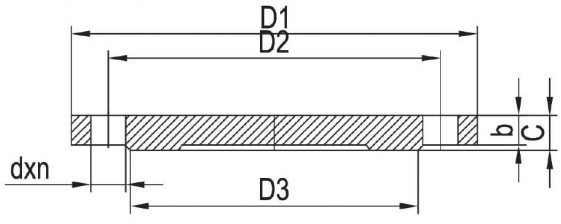



SIZE	D1	D2	D3	C	B	DXN
3	200	160	132	19	16	19x8
4	220	180	156	19	16	19x8
6	285	240	211	19	16	23x8

COMBINATION WYE & 1/8 BEND



SIZE	A	B	C	WT.
1 1/2	6	5 3/8	4 3/4	2.86
2	6 5/8	5 3/8	5 3/8	3.7
2x1 1/2	6	5 3/8	5	2.8
3	8	8	7 5/16	6.6
3x2	6 5/8	6 3/4	5 1/2	4.6
4	9 1/2	10	9 1/4	13.0
4x2	6 5/8	5 1/2	7 1/4	6.3
4x3	8	7 1/4	8 1/2	8.6
6	14 1/16	14 3/8	13 5/8	29.8
6x2	8 5/16	8 1/4	6	10.0
6x3	9 11/16	9 1/2	1 11/16	12.5
6x4	11 3/16	11	9 3/4	17.5

Distributor

SUPRANUSA

Kirana Boutique Office, Blok B2/9
Jl. Boulevard Raya No. 1, Kelapa Gading
Jakarta 14240
Indonesia

P +6221 2245.0109
F +6221 2245.0120
E mkt@snj.co.id
W www.snj.co.id

SCAN ME
FOR MORE INFO !!